

MEMBRANE EXTRACTION - TECHNIQUE FOR MONITORING INORGANIC POLLUTANTS

Ioana Diaconu¹, Elena Ruse¹, Ecaterina Anca Șerban^{2*}

¹University Politehnica of Bucharest, Faculty of Applied Chemistry and Materials Science, 1-7 Polizu Street, 011061, Bucharest, Romania

²National Research and Development Institute for Industrial Ecology – ECOIND Bucharest, 71-73 Drumul Podul Dambovitei Street, 060652, Bucharest, Romania, *katyserban@yahoo.com*

* *Corresponding author*

INTRODUCTION

Inorganic pollutants represent a major risk to the health of the population and ecosystems because they are not biodegradable. Due to the mobility in the environment, they can get into the food chain and thus can seriously affect the health of the population. The most important source of pollution is anthropogenic nature and is mainly due to industrial activity. Mining and processing activities, metal coatings, tailings deposits, waste discharges have a special impact on surface water which is a vector for the transmission of contaminants at a distance (soil, groundwater). Monitoring them is a first utility activity. In this paper are presented the results obtained at the separation of some metallic cations: Zn^{2+} , Cu^{2+} frequently found in wastewater or other industrial residues. The presence of high doses of these cations severely affects people's health. Copper causes anemia and diseases of the liver and kidneys. Zinc intoxication in humans causes gastric irritation and other digestive phenomena with complex metabolic consequences. Zinc also causes respiratory disorders, but also nutritional disorders.

MATERIALS AND METHOD

Procedure

The membrane system used consisted of:

- Feed phase (FP) - metallic cation solution (each in a concentration of 5×10^{-2} mol/L) in the presence of NaCl (0.5 - 2.5 mol/L). $V_{FP} = 20$ cm³;
- Membrane (M) - Cyphos IL 102 concentration 10^{-2} mol/L in chloroform. $V_M = 50$ cm³;
- Stripping phase (RP) – soluție HCl, concentrație 10^{-3} mol/L). $V_M = 7$ cm³.

The laboratory experiments were performed in a tube-in-tube type transport cell. The transport time was 8 hours and the stirring speed of the phases was 200 rpm. The content of metallic cations in the aqueous phases of the membrane system at the end of the extraction process were performed by atomic absorption spectrometry using a Solar Atomic Absorption Spectrometer, type M6 Dual, Thermo Electron.

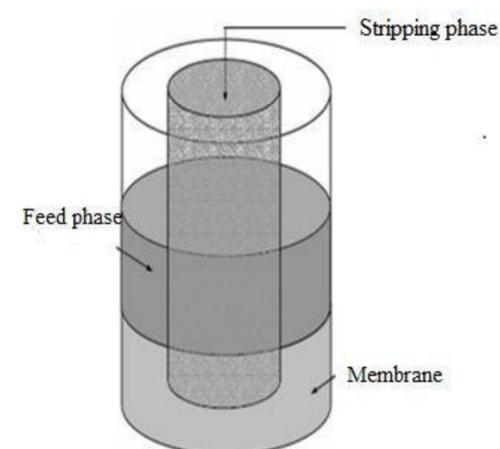


Figure 1. Experimental device

RESULTS AND DISCUSSIONS

In the feed phase containing Zn^{2+} and Cu^{2+} in the presence of 2.5 mol/L NaCl, the zinc cation forms $ZnCl_4^{2-}$ while copper remains in the form of Cu^{2+} .

The Cyphos IL 102 carrier will interact with the zinc complex anion and transfer it to the stripping phase where the Cl^- concentration is low and no longer ensures the stability of the zinc complex. Thus, a practical quantitative separation of Zn^{2+} from Cu^{2+} is obtained with possible analytical applications.

Experimental parameters:

- time transport;
- the concentration of NaCl from the feed phase.

CONCLUSIONS

- Using the bulk liquid membranes technique, a separation of Cu^{2+} - Zn^{2+} cations was obtained.
- The optimal separation conditions correspond to a transport time of 8 hours and a concentration of NaCl in the feed phase higher than 1 mol/L.
- The results of this study demonstrate the applicability of transport through liquid membranes to the separation of metallic cations from complex matrices for analytical purposes.

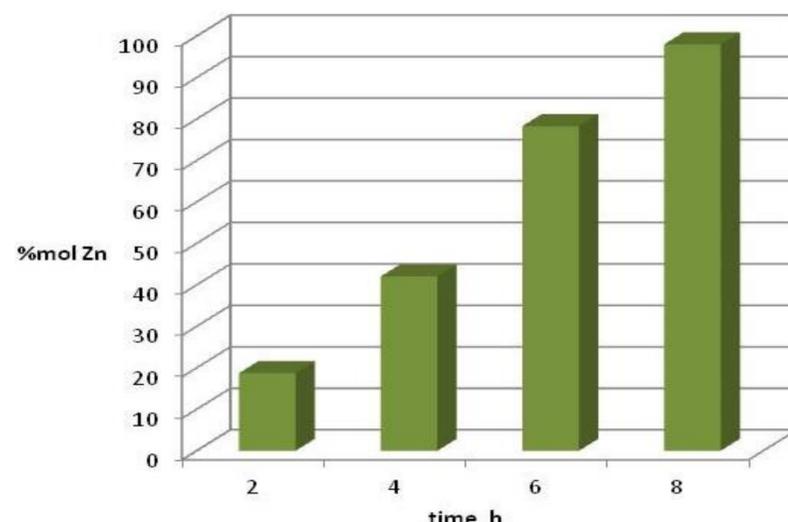


Figure 2. The time variation of the recovered content by the Zn^{2+} in the liquid membrane system.

Table 1. Influence of concentration of NaCl in feed phase (FP)

Concentration of NaCl, mol/L	Phases composition, % mol			Efficiency, %
	FS	M	FR	
0,5	72,0	0,1	27,9	27,9
1	1,5	0,5	98	98
2,5	0,1	1	98,9	98,9

ACKNOWLEDGEMENTS

The studies were performed within the frame Program for Center of Excellence funded by National Research and Development Institute for Industrial Ecology.