

Florentina Laura Chiriac, Florinela Pirvu, Iuliana Paun, Catalina Stoica, Vasile Iancu, Gabriel Valentin Serban, Marcela Niculescu, Luoana Florentina Pascu, Toma Galaon

National Research and Development Institute for Industrial Ecology – ECOIND, Drumul Podu Dambovitei 71-73, Sector 6, 060652, Bucharest, Romania

Abstract

In this context, global parameters such as AOX (adsorbable organic halogens) and TOC/DOC (total organic carbon/dissolved organic carbon) can be effective indicators that provide clues about the presence of hazardous chemical components in aquatic environment. AOX include a wide range of chemical compounds that contain at least one halogen atom in their molecule (chloride, bromide or iodide, but without fluoride) such as: polychlorinated biphenyls (PCBs), DDT, polychlorinated dibenzo-dioxins and dibenzo-furans (PCDDs / DFs). The parameter measured for total organic matter evaluation is quantified as either total organic carbon (TOC) or dissolved organic carbon (DOC). The value of the TOC / DOC parameter provides a global information on the total organic matter content in surface water and sediment. This abstract presents the results obtained for AOX and TOC/DOC parameters in water and sediments from the Danube river.

Materials and methods

The surface water and sediment samples were taken along the Danube river, from the sampling points: Bazias (S1), Eselnita (S2), Gruia (S3), Zimnicea (S4) and Giurgiu (S5). The preparation and analysis of the samples was done in accordance with the standard methods SR EN ISO 9562:2005 and SR EN 16166:2013 for AOX and SR EN 1484:2001 for TOC/DOC.

For sediment samples, the concentration levels determined for AOX and DOC proved to be comparable (Figure 2a). Values in the same concentration range can be explained by the presence of a large number of hydrophobic halogenated organic compounds ($\log K_{ow} > 3$) in the aquatic environment and also by their high adsorption capacity on solid sediment particles. Similar to surface water samples, and in the case of sediment samples, the variation of the AOX concentration is closely followed by the DOC concentration (Figure 2b).

Results

In surface water samples, the AOX concentration values were lower than $100 \mu\text{g Cl/L}$. According to German classification system, river water can be considered slightly polluted, if the AOX concentration is less than $5 \mu\text{g Cl/L}$, moderately polluted for AOX concentrations between $5\text{--}20 \mu\text{g Cl/L}$, heavily polluted for values between $20\text{--}40 \mu\text{g Cl/L}$ and highly polluted for concentrations higher than $40 \mu\text{g Cl/L}$. With the exception of the S4 surface water sample, the concentration level of AOX was above $40 \mu\text{g/L}$, which indicates a fairly high pollution in the studied areas. As can be seen in Figure 1a, the TOC values ($2.27\text{--}2.81 \text{ mg C/L}$) were much higher than those of AOX, which means that in the analyzed samples there are many organic pollutants that do not contain halogen atoms in the molecule. However, the variation in AOX concentration appears to follow a similar trend to that of TOC variation (Figure 1b).

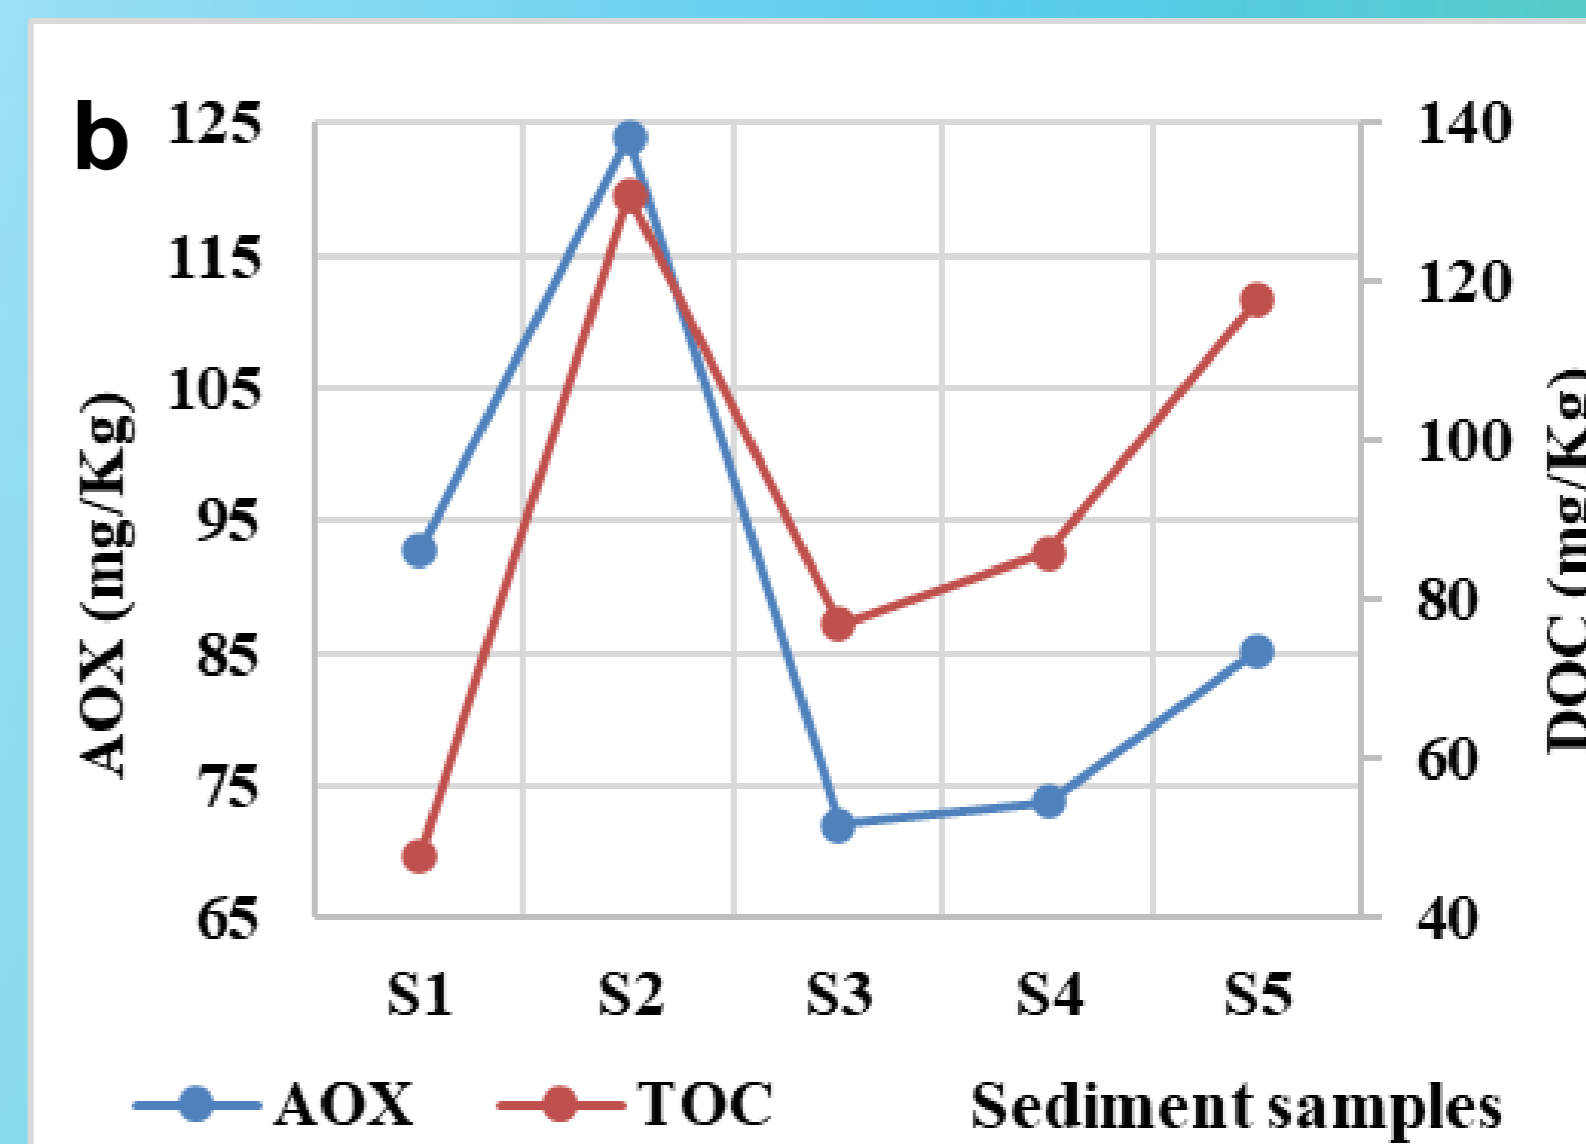
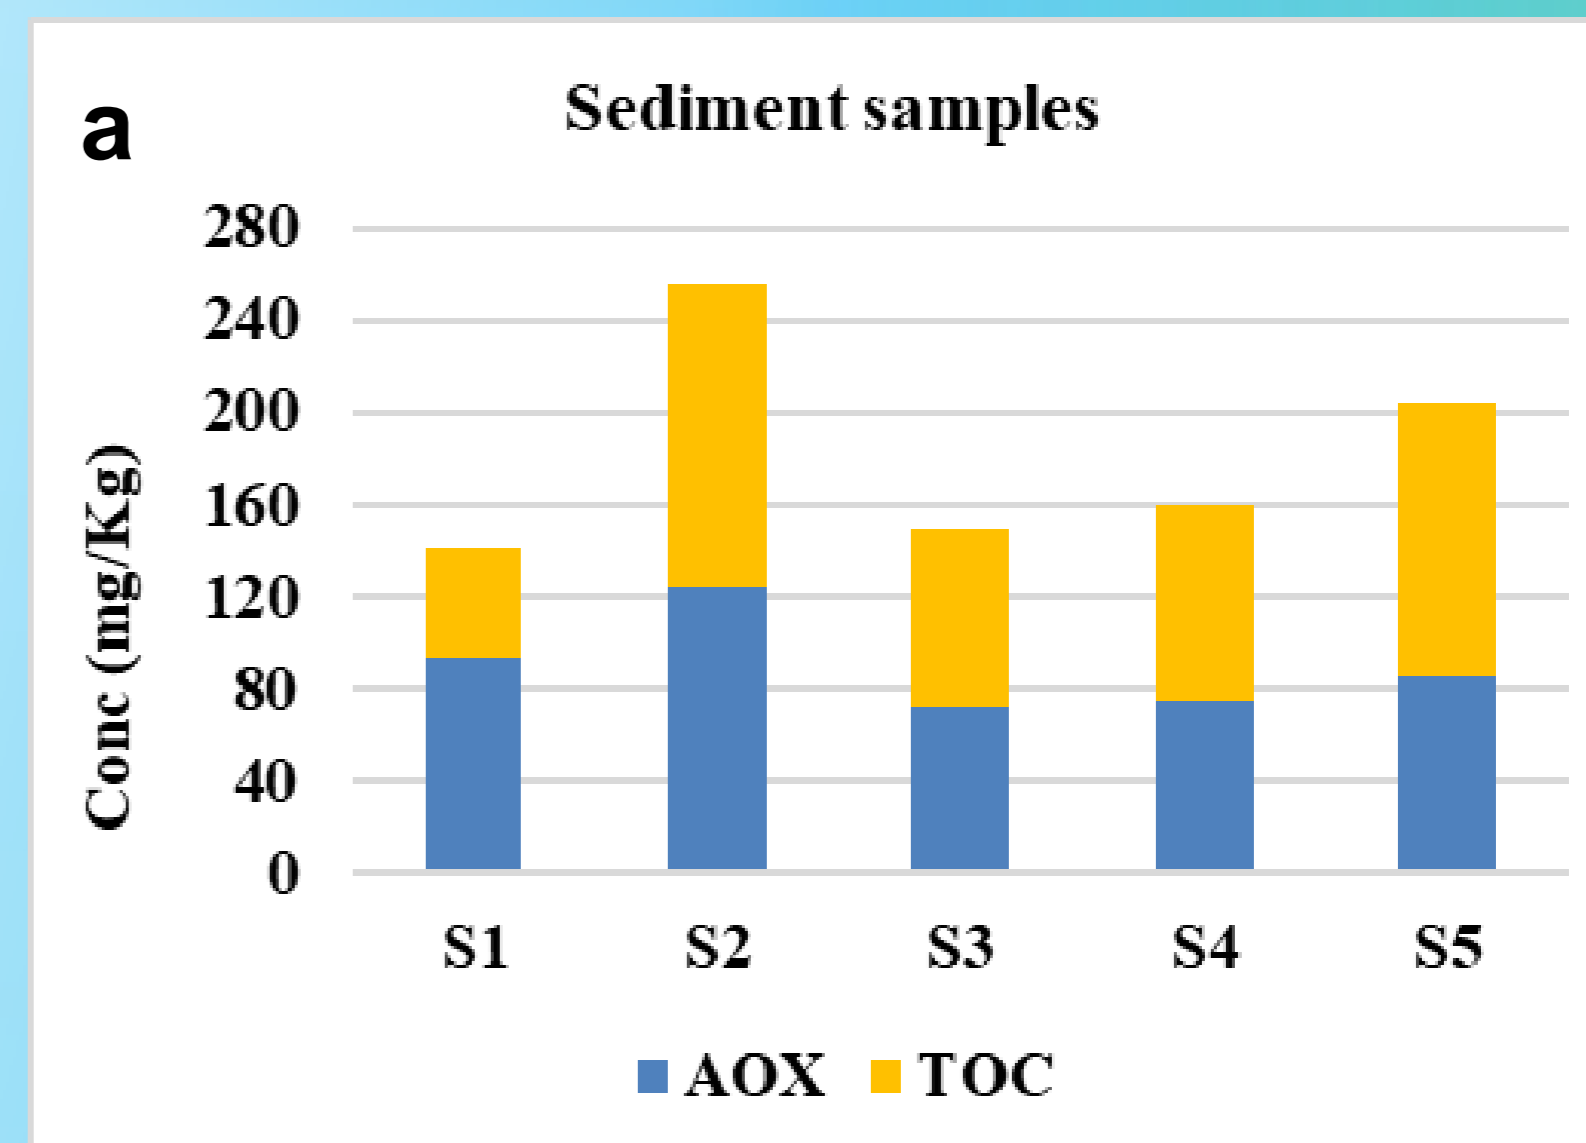


Figure S2. AOX and TOC distribution pattern in sediment (a) and comparison between AOX and TOC in sediment for the same treatment locations (b)

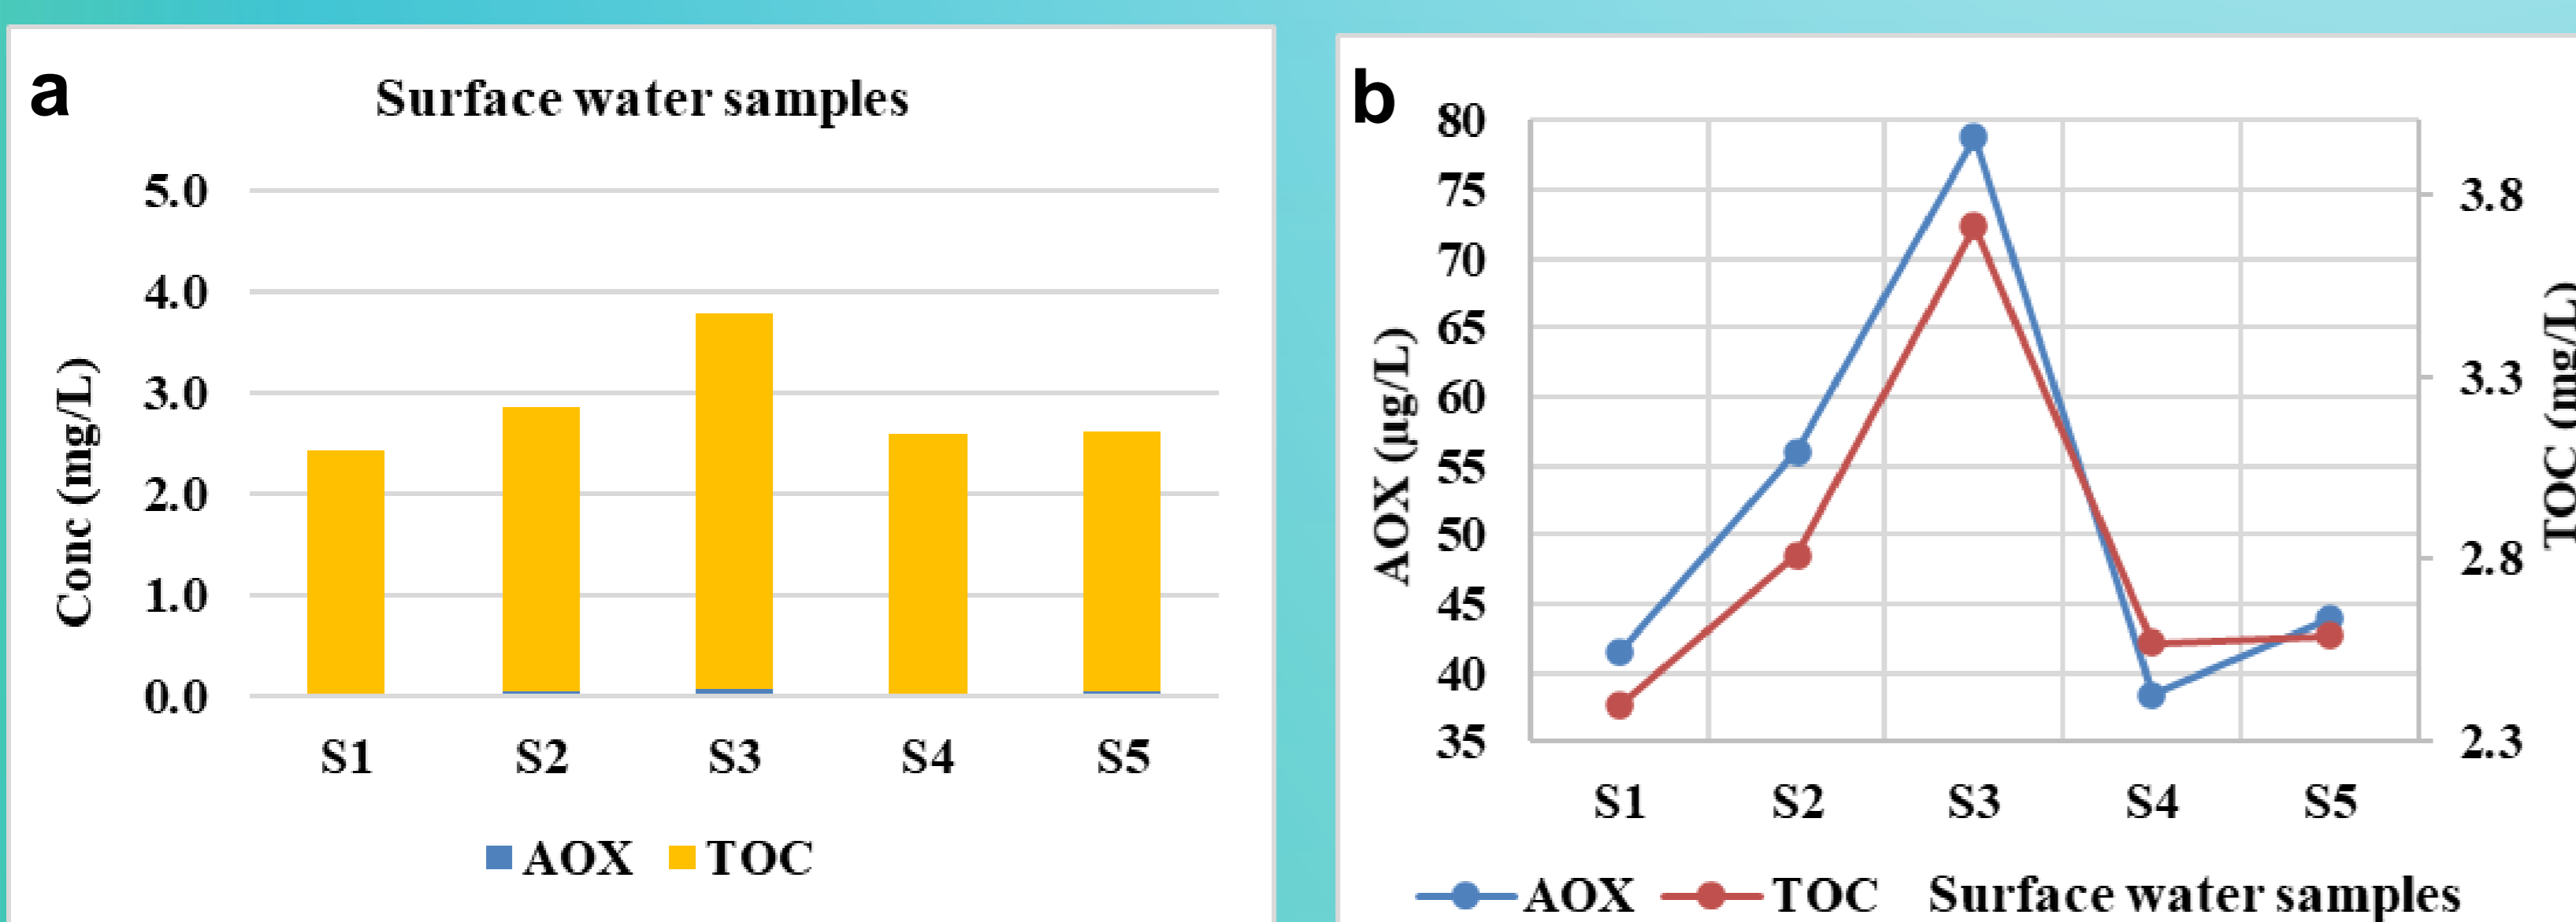


Figure S1. AOX and TOC distribution pattern in surface water (a) and comparison between AOX and TOC in surface water for the same treatment locations (b)

Conclusion

The preliminary results obtained confirm the need to start a comprehensive study on the detection and identification of specific organic pollutants present in the Danube River (surface water and sediment), as well as the determination of negative effects they have on the aquatic organisms (plants, invertebrates and fish).